Thru-beam sensor

LD31/LV31-6559/25/38/115





Model Number


LD31/LV31-6559/25/38/115

Thru-beam sensor with 2 m fixed cable


Features

- Operating voltage DC
- Highly visible LED
- Protection class II
- Relay output
- Compact and stable housing

Dimensions

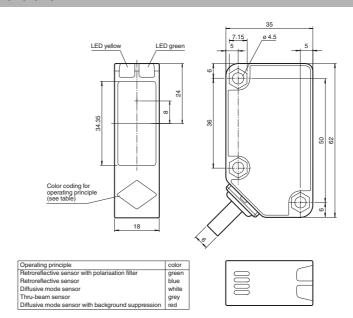

Electrical connection

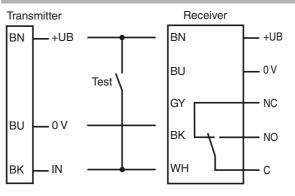

Release date: 2017-09-15 08:56 Date of issue: 2017-09-15 271173_eng.xml

 Refer to "General Notes Relating to Pepperl+Fuchs Product Information"

 Pepperl+Fuchs Group
 USA: +1 330 486 0001
 G

www.pepperl-fuchs.com fa-info@us.pep

USA: +1 330 486 0001 G fa-info@us.pepperl-fuchs.com fa

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



	Accessories
	OMH-RL31-01 Mounting bracket
	OMH-RL31-02 Mounting bracket narrow
yht , 630 nm	OMH-RL31-03 Mounting bracket narrow
icient light signal received, emitter and rrect ng switching point s interrupted or the alignment is out	OMH-RL31-04 Mounting aid for round steel ø 12 mm or sheet 1.5 mm 3 mm
stance of 30 m : 1.5 ° EN 60947-5-2	OMH-RL31-05 Mounting bracket with M10 threaded rod
	OMH-RL31-06 Stainless steel mounting bracket with ad- justable half clamp on the side
	Other suitable accessories can be found at www.pepperl-fuchs.com
nal > 2 x switching point (function	
etween 1 x switching point and 2 x swit-	
ching point	
°F) °F)	

Technical data		
System components		
Emitter		LD31-6559
Receiver		LV31-6559/25/38
General specifications		
Effective detection range		0 30 m
Threshold detection range		43 m
Light source		LED
Light type		modulated visible red light , 630 nm
Alignment aid		LED yellow: 1. LED illuminates: Sufficient light signal received, emitter and receiver alignment is correct 2. LED flashes: Reaching switching point 3. LED off: Light beam is interrupted or the alignment is out
Diameter of the light spot		approx. 800 mm at a distance of 30 m
Angle of divergence		Emitter: 0.5 ° , Receiver: 1.5 °
Ambient light limit		50000 Lux ; according EN 60947-5-2
Functional safety related para	meters	
MTTF _d		620 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
ndicators/operating means		
Operation indicator		LED green: power on
Function indicator		LED yellow: 1. LED lit constantly: signal > 2 x switching point (function reserve) 2. LED flashes: signal between 1 x switching point and 2 x sw ching point 3. LED off: signal < switching point
Electrical specifications		
Operating voltage	U _B	12 30 V DC
No-load supply current	I ₀	Emitter: ≤ 18 mA Receiver: ≤ 20 mA
Dutput		
Switching type		light on
Signal output		Relay, 1 alternator
Switching voltage		max. 30 V DC
Switching current		max. 1 A
Switching frequency	f	≤ 20 Hz
Response time		≤ 25 ms
Ambient conditions		
Ambient temperature		-25 55 °C (-13 131 °F)
Storage temperature		-40 70 °C (-40 158 °F)
Mechanical specifications		
Housing width		18 mm
Housing height		62 mm
Housing depth		35 mm
Degree of protection		IP67
Connection		Emitter: 0.5 m , 2-wire
		Receiver: 0.5 m , 5-wire
Material		
Housing		Polycarbonate
Optical face		PMMA
Mass		Emitter: 80 g Receiver: 100 g
Compliance with standards an ves	nd directi	
Directive conformity Standard conformity		EMC Directive 2004/108/EC
Standard conformity Product standard		
Product standard		EN 60947-5-2:2007 IEC 60947-5-2:2007
Approvals and certificates		
Protection class		II , rated voltage ≤ 250 V AC with pollution degree 1-2 accor- ding to IEC 60664-1 Output circuit basis insulation of input c cuit according to EN 50178, rated insulation voltage 240 V A
UL approval		cULus Listed, Class 2 Power Source, Type 1 enclosure
CCC approval		CCC approval / marking not required for products rated \leq 36


2


Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Curves/Diagrams

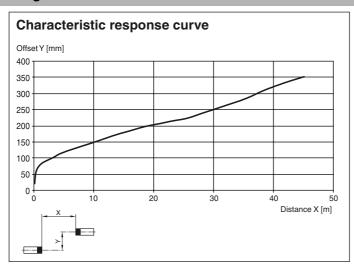

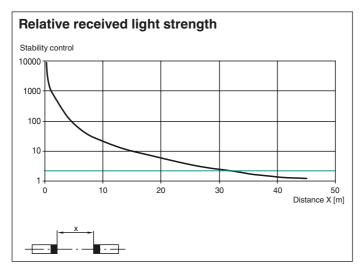

Release date: 2017-09-15 08:56 Date of issue: 2017-09-15 271173_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group USA: +1 330 486 0001 www.pepperl-fuchs.com

fa-info@us.pepperl-fuchs.com

