



Model Number

NBN40-L2-E2-V1-3G-3D

Features

- Sensor head bidirectional and rotatable
- 40 mm non-flush
- 3-wire DC
- Quick mounting bracket
- 4-way LED indicator
- ATEX-approval for zone 2 and zone 22

Accessories

MHW 01

Modular mounting bracket

MH 02-L

Mounting aid

V1-G

Female connector, M12, 4-pin, field attachable

MH 04-2681F

Mounting aid for VariKont, +U1+ and +U9*

V1-W

Female connector, M12, 4-pin, field attachable

V1-W-2M-PUR

Female cordset, M12, 4-pin, PUR cable

V1-G-2M-PUR

Female cordset, M12, 4-pin, PUR cable

Technical Data

General specifications

Switching function	Normally open (NO)
Output type	PNP
Rated operating distance	s_n 40 mm
Installation	non-flush
Output polarity	DC
Assured operating distance	s_a 0 ... 32.4 mm
Actual operating distance	s_r 36 ... 44 mm typ. 40 mm
Reduction factor r_{Al}	0.33
Reduction factor r_{Cu}	0.31
Reduction factor r_{304}	0.74
Reduction factor r_{Brass}	0.38
Output type	3-wire

Nominal ratings

Operating voltage	U_B 10 ... 30 V DC
Switching frequency	f 0 ... 180 Hz
Hysteresis	H typ. 5 %
Reverse polarity protection	reverse polarity protected
Short-circuit protection	pulsing
Voltage drop	U_d ≤ 2 V
Design data	
Operating current	I_L 0 ... 200 mA
Off-state current	I_r 0 ... 0.5 mA
No-load supply current	I_0 ≤ 20 mA
Time delay before availability	t_v 80 ms
Operating voltage indicator	LED, green
Switching state indicator	LED, yellow

Functional safety related parameters

MTTF _d	1057 a
Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Connection type	Connector plug M12 x 1, 4-pin
Housing material	PA
Sensing face	PA
Degree of protection	IP69K
Mass	130 g

General information

Use in the hazardous area	see instruction manuals
---------------------------	-------------------------


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012


Approvals and certificates

Protection class	II
Rated insulation voltage	U_i 253 V
Rated impulse withstand voltage	U_{imp} 4000 V
UL approval	cULus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤ 36 V


Dimensions

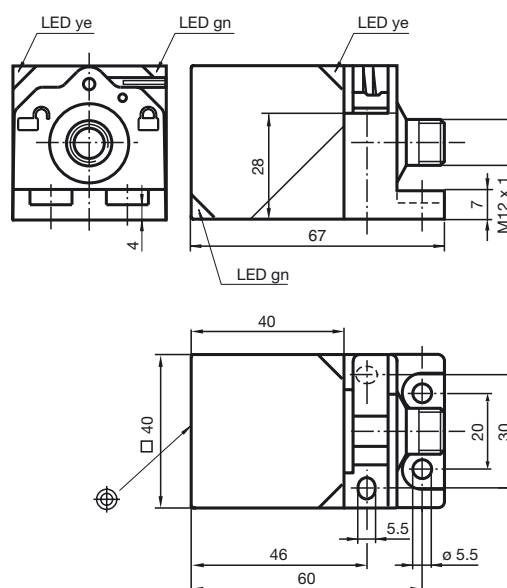

Electrical Connection



Pinout



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Data for application in connection with hazardous areas

Equipment protection level	Gc (nA) , Dc
----------------------------	--------------

Equipment protection level Gc (nA)

Type of protection	"n"
CE marking	

Certificates

ATEX certificate	PF15CERT3754X
------------------	---------------

ATEX marking	 II 3G Ex nA IIC T6 Gc
--------------	---

Standards	EN 60079-0:2012+A11:2013 , EN 60079-15:2010
-----------	---

Possible characteristics

maximum operating voltage U_{Bmax} , maximum load current I_{Lmax} , minimum series resistance R_V , maximum analog output voltage U_{Amax} , maximum analog output current I_{Amax}

Maximum permissible ambient temperature T_{amb}

Also observe the maximum permissible ambient temperature stated in the general technical data.

Keep to the lower of the two values.

at $U_{Bmax} = 30\text{ V}$, $I_L = 200\text{ mA}$: 48 °C (118.4 °F)

at $U_{Bmax} = 30\text{ V}$, $I_L = 100\text{ mA}$: 50 °C (122 °F)

at $U_{Bmax} = 30\text{ V}$, $I_L = 50\text{ mA}$: 51 °C (123.8 °F)

at $U_{Bmax} = 30\text{ V}$, $I_L = 25\text{ mA}$: 52 °C (125.6 °F)

Equipment protection level Dc

Type of protection	Protection by enclosure "tc"
CE marking	

Certificates

ATEX certificate	PF15CERT3774X
------------------	---------------

ATEX marking	 II 3D Ex tc IIIC T80°C Dc
--------------	---

Standards	EN 60079-0:2012+A11:2013 , EN 60079-31:2014
-----------	---

Maximum permissible ambient temperature T_{amb}

Also observe the maximum permissible ambient temperature stated in the general technical data.

Keep to the lower of the two values.

at $U_{Bmax} = 30\text{ V}$, $I_L = 200\text{ mA}$: 48 °C (118.4 °F)

at $U_{Bmax} = 30\text{ V}$, $I_L = 100\text{ mA}$: 50 °C (122 °F)

at $U_{Bmax} = 30\text{ V}$, $I_L = 50\text{ mA}$: 51 °C (123.8 °F)

at $U_{Bmax} = 30\text{ V}$, $I_L = 25\text{ mA}$: 52 °C (125.6 °F)