



Model Number

DK21-25/110/124

Print mark contrast sensor
with 5-pin, M12 x 1 connector

Features

- Diffuse mode sensor for recording any print mark
- Dynamic TEACH-IN: automatic switching threshold adaptation with one key pressure
- Optical system exchangeable by 90°
- 30 µs response time, suitable for extremely rapid scanning processes
- 3 emitter colors: green, red and blue

Product information

The contrast sensor series DK10, DK2X, DKE2X and DK3X have an extreme robust and IP67 tight industrial standard housing with eight M5 metal reinforced inserts for sensor mounting. The lenses are made of high grade glass. All sensors offer different light spot shapes and orientations and have powerful push-pull outputs (NPN/PNP/push-pull).


The DK10 sensor series offers laser and LED light sources, a manual sensitivity adjustment and high sensing ranges up to 800 mm.

The DK20/DK21/DKE2X standard contrast sensor series offers a very good contrast recognition and are available in extreme robust stainless-steel housings (DKE).

The DK31/DK34/DK35 sensor series is designed for cutting edge contrast recognition at highest sensitivity level.


The series DK20/DK34 offer a static Teach-In, the DK21/DKE21/DK31/DK35 series offer a dynamic Teach-In.

Dimensions

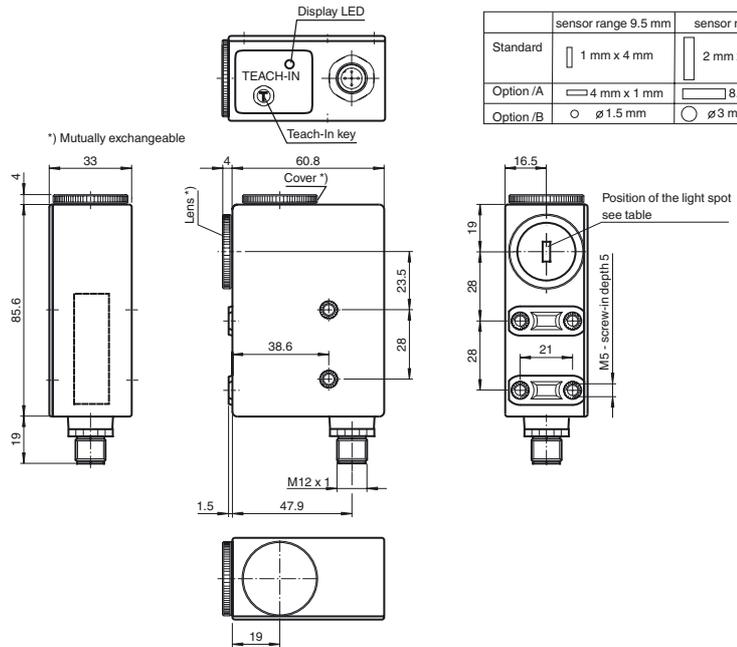


| | sensor range 9.5 mm | sensor range 25 mm |
|-----------|---------------------|--------------------|
| Standard | 1 mm x 4 mm | 2 mm x 8.5 mm |
| Option /A | 4 mm x 1 mm | 8.5 mm x 2 mm |
| Option /B | ∅ 1.5 mm | ∅ 3 mm |

Electrical connection

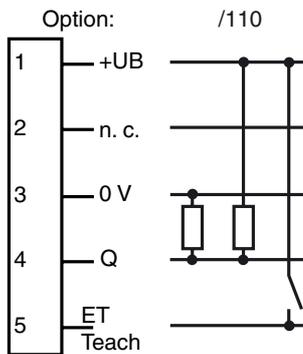

Pinout



Wire colors in accordance with EN 60947-5-2

| | | |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue) |
| 4 | BK | (black) |
| 5 | GY | (gray) |

Release date: 2017-02-15 17:52 Date of issue: 2017-02-15 418094_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

Technical data**General specifications**

| | |
|---------------------------|-----------------------------------------|
| Sensor range | 25 mm ± 6 mm |
| Light source | LED |
| Light type | Visible green/red/blue, modulated light |
| Light spot representation | 2 mm x 8.5 mm |
| Angle deviation | max. ± 3° |
| Ambient light limit | |
| Continuous light | 7000 Lux |
| Teach-In | Dynamic Teach-In |

Functional safety related parameters

| | |
|--------------------------------|-------|
| MTTF _d | 650 a |
| Mission Time (T _M) | 20 a |
| Diagnostic Coverage (DC) | 0 % |

Indicators/operating means

| | |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Function indicator | LED yellow; switching operation: lights up if print mark is detected Alarm display: flashing quickly, if no safe operation is possible |
| Control elements | Teach-In key |

Electrical specifications

| | | |
|------------------------|----------------|----------------|
| Operating voltage | U _B | 10 ... 30 V DC |
| Ripple | | 10 % |
| No-load supply current | I ₀ | ≤ 60 mA |

Input

| | |
|----------------|----------------|
| Function input | Teach-In input |
|----------------|----------------|

Output

| | | |
|---------------------|-----------------------------------------------------------------------|----------|
| Signal output | Push-pull output, short-circuit protected, reverse polarity protected | |
| Switching voltage | PNP: ≥ (+U _B - 2.5 V) , NPN: ≤ 1.5 V | |
| Switching current | max. 200 mA | |
| Switching frequency | f | 16.5 kHz |
| Response time | | 30 μs |

Ambient conditions

| | |
|---------------------|-------------------------------|
| Ambient temperature | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | -20 ... 75 °C (-4 ... 167 °F) |

Mechanical specifications


| | |
|----------------------|--------------------------------------|
| Degree of protection | IP67 |
| Connection | 5-pin, M12 x 1 connector |
| Material | |
| Housing | PC (glass-fiber-reinforced Makrolon) |
| Optical face | glass |
| Mass | 200 g |

Compliance with standards and directives

| | |
|-----------------------------|--------------------------------------------------------------------------|
| Standard conformity | |
| Product standard | EN 60947-5-2:2007 IEC 60947-5-2:2007 |
| Shock and impact resistance | IEC / EN 60068. half-sine, 40 g in each X, Y and Z directions |
| Vibration resistance | IEC / EN 60068-2-6. Sinus. 10 -150 Hz, 5 g in each X, Y and Z directions |

Approvals and certificates

| | |
|--------------|--------------------------------------------------------------|
| CCC approval | CCC approval / marking not required for products rated ≤36 V |
|--------------|--------------------------------------------------------------|

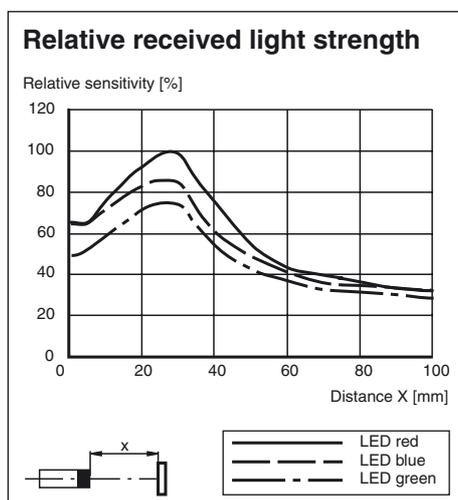**Additional information**

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

Adjustment

1. Adjust light spot to background. The sensor must be bend 10° to 15° towards the material surface if the object surface is reflective or glossy.
2. Keep Teach-In key at the device pressed or connect +UB to external input ET continuously. The Teach-In process starts 50 ms after the Teach-In signal is connected.
3. The print mark must cover the light spot for at least 1 ms completely. Move the print mark through the light spot.
4. The Teach-In process finishes 50 ms after the Teach-In-signal (keystroke or ET) with the following possible conditions:
Teach-In successful: the non-volatile saving of the taught-in values in EEPROM follows. Indicator-LED illuminates when print mark is detected. Push-pull output switches when print mark is detected to +U_B, with background to 0 V.
ALARM-function: Recorded contrast for all emitter light colours too faint. Indicator-LED flashes with approx. 4 Hz, optional analog-output shows minimal signal. Return to the operation mode with the latest accepted values after keystroke or +U_B at ET (at least 50 ms).

The switching level is centered between the evaluated print mark/background-contrast values.

The sensor automatically selects and stores the most suitable emitter colour for the best print mark/background-contrast.

For exact contrast evaluation, the DK... can optionally be equipped with an additional analogue output.

Emitter-test function:

1. Switch on sensor supply while active Teach-In signal (keystroke or ET).
2. After Teach-In is released, the green emitter is switched.
3. The red emitter is switched after the second Teach-In.
4. The blue emitter is switched after the third Teach-In.
5. After the fourth Teach-In: normal switching operation.

The switching of the output is suppressed during the test operation.

