



Model Number


RL28-8-H-700-IR/110/115

Background suppression sensor with 2.5 m fixed cable

Features


CE

- Ultra bright LEDs for power on and ٠ switching state
- Minimal black-white difference ٠ through the infrared transmission LED
- Not sensitive to ambient light, even • with energy saving lamps
- Waterproof, degree of protection IP67 •
- Protection class II

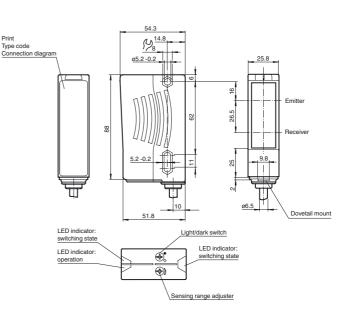

Electrical connection

Dimensions





Pepperl+Fuchs Group www.pepperl-fuchs.com

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Technical data

rechnical data		
General specifications		
Detection range		20 700 mm
Detection range min.		20 200 mm
Detection range max.		20 700 mm
Background suppression		max. + 10 % of the upper limit of the detection range
Light source		IRED
Light type		modulated infrared light , 880 nm
Black/White difference (6 %/90 %))	< 8 %
Diameter of the light spot		approx. 24 mm at a distance of 700 mm
Angle of divergence		transmitter 2° receiver 2°
Ambient light limit		50000 Lux
Functional safety related parame	eters	
MTTF _d		720 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Function indicator		2 LEDs yellow ON: object inside the scanning range OFF: object outside the scanning range
Control elements		Sensing range adjuster , Light-on/dark-on changeover switch
Electrical specifications		
Operating voltage	UB	10 30 V DC
Ripple	- 0	10 %
No-load supply current	I ₀	≤ 40 mA
Output	Ū	
Switching type		light/dark on switchable
Signal output		1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Switching frequency	f	250 Hz
Response time		2 ms
Conformity		
Product standard		EN 60947-5-2
Ambient conditions		
Ambient temperature		-40 60 °C (-40 140 °F)
Storage temperature		-40 75 °C (-40 167 °F)
Mechanical specifications		
Housing width		25.8 mm
Housing height		88 mm
Housing depth		54.3 mm
Degree of protection		IP67
Connection		2500 mm fixed cable
Material		
Housing		Plastic ABS
Optical face		plastic
Mass		70 g
Approvale and cortificates		
Approvals and certificates Protection class		
UL approval		II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1
		E87056, cULus Listed, class 2 power supply, type rating 1

700 mm
200 mm
700 mm
ax. + 10 % of the upper limit of the detection range
ED
odulated infrared light , 880 nm
3 %
prox. 24 mm at a distance of 700 mm
nsmitter 2° ceiver 2°
000 Lux
0 a
a
%
D green
EDs yellow
1: object inside the scanning range FF: object outside the scanning range
nsing range adjuster , Light-on/dark-on changeover switch
30 V DC
%
40 mA
ht/dark on switchable
oush-pull (4 in 1) output, short-circuit protected, reverse larity protected
ax. 30 V DC
ax. 100 mA
0 Hz
ns
€0947-5-2
00077-02
C 60 °C (40 140 °E)
060 °C (-40 140 °F)
0 75 °C (-40 167 °F)
.8 mm
mm
.3 mm
67
00 mm fixed cable
astic ABS
astic
9
, rated voltage \leq 250 V AC with pollution degree 1-2 ccording to IEC 60664-1

Accessories

OMH-05

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

OMH-07

Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm

OMH-21 Mounting bracket

OMH-22 Mounting bracket

OMH-MLV11-K dove tail mounting clamp

OMH-RLK29-HW Mounting bracket for rear wall mounting

OMH-RL28-C Weld slag cover model


Other suitable accessories can be found at www.pepperl-fuchs.com


www.pepperl-fuchs.com



2

Curves/Diagrams

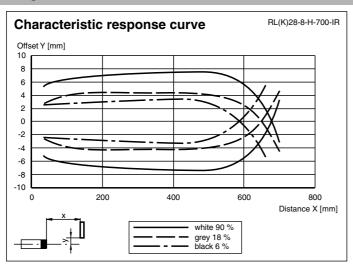

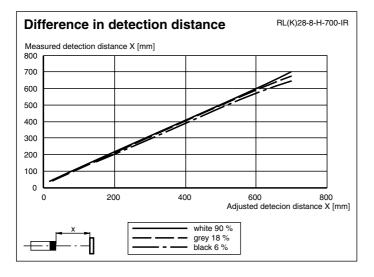

Additional information

Mounting instructions:

There are two bore holes for mounting the sensor with M5 bolts. The base surface must be flat to avoid distorting the housing during mounting. It is advisable to secure the bolts with spring washers so that the sensor does not become misaligned. Outdoor installation:

The sensor must be protected against rain and splash-water, possibly must a cover be installed.

Adjustment:

Adjust the sensor on the background. After the connecting to the power supply the green LED illuminates. In case the yellow LEDs illuminate too, the detection range needs to be reduced with the detection range adjuster, until the yellow LEDs is switched off. If the object is moved into the detection range the yellow LEDs illuminates.

Driving inductive loads:

If the sensor are used to drive inductive loads, the following safety procedures must be carried out: For operating voltage of 10 ... 30 V DC: fit a protection diode, max. 200 mA

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

