




Model Number

SJ10-N

Features

- Usable up to SIL 2 acc. to IEC 61508
- 10 mm slot width

Technical Data

General specifications

Switching function	Normally closed (NC)
Output type	NAMUR
Slot width	10 mm
Depth of immersion (lateral)	13.5 ... 16.5 mm, typ. 15 mm
Output type	2-wire

Nominal ratings

Nominal voltage	U_o	8.2 V (R_i approx. 1 k Ω)
Operating voltage	U_B	5 ... 25 V
Switching frequency	f	0 ... 1000 Hz
Hysteresis	H	0.1 ... 0.5 mm

Design data

Current consumption		
Measuring plate not detected	≥ 3 mA at nominal voltage	
Measuring plate detected	≤ 1 mA at nominal voltage	

Functional safety related parameters

MTTF _d	11460 a
Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)
---------------------	---------------------------------

Mechanical specifications

Connection type	cable PVC, 2 m
Core cross-section	0.75 mm ²
Housing material	PBT
Degree of protection	IP67
Cable	
Bending radius	$> 10 \times$ cable diameter

General information

Use in the hazardous area	see instruction manuals
---------------------------	-------------------------


Compliance with standards and directives

Standard conformity	
NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012


Approvals and certificates

FM approval	
Control drawing	116-0165
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤ 36 V

Dimensions

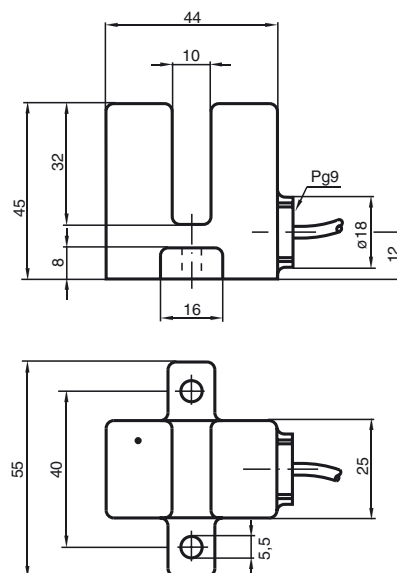

Electrical Connection



**Data for application in connection with hazardous areas**

Equipment protection level	Ga , Gb , Da , Mb
----------------------------	-------------------

Equipment protection level Ga

Type of protection	intrinsic safety
CE marking	0102

Certificates

Appropriate type	SJ10-N...
ATEX certificate	PTB 99 ATEX 2219 X
ATEX marking	II 1G Ex ia IIC T6...T1 Ga
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012
IECEx certificate	IECEx PTB 11.0091X
IECEx marking	Ex ia IIC T6...T1 Ga
Standards	IEC 60079-0:2011 , IEC 60079-11:2011

Effective internal capacitance	C_i	$\leq 50 \text{ nF}$ A cable length of 10 m is considered.
--------------------------------	-------	---

Effective internal inductance	L_i	$\leq 1000 \mu\text{H}$ A cable length of 10 m is considered.
-------------------------------	-------	--

Maximum permissible ambient temperature T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values.	
--	--	--

for ATEX	at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 34 \text{ mW}$, T6 : 55 °C (131 °F) T5 : 67 °C (152.6 °F) T4 : 95 °C (203 °F) T3 : 95 °C (203 °F) T2 : 95 °C (203 °F) T1 : 95 °C (203 °F) at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 64 \text{ mW}$, T6 : 48 °C (118.4 °F) T5 : 60 °C (140 °F) T4 : 88 °C (190.4 °F) T3 : 88 °C (190.4 °F) T2 : 88 °C (190.4 °F) T1 : 88 °C (190.4 °F) at $U_i = 16 \text{ V}$, $I_i = 52 \text{ mA}$, $P_i = 169 \text{ mW}$, T6 : 25 °C (77 °F) T5 : 37 °C (98.6 °F) T4 : 65 °C (149 °F) T3 : 65 °C (149 °F) T2 : 65 °C (149 °F) T1 : 65 °C (149 °F) at $U_i = 16 \text{ V}$, $I_i = 76 \text{ mA}$, $P_i = 242 \text{ mW}$, T6 : 9 °C (48.2 °F) T5 : 21 °C (69.8 °F) T4 : 49 °C (120.2 °F) T3 : 49 °C (120.2 °F) T2 : 49 °C (120.2 °F) T1 : 49 °C (120.2 °F)	
----------	---	--

for IECEx	at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 34 \text{ mW}$, T6 : 72 °C (161.6 °F) T5 : 87 °C (188.6 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 64 \text{ mW}$, T6 : 66 °C (150.8 °F) T5 : 81 °C (177.8 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16 \text{ V}$, $I_i = 52 \text{ mA}$, $P_i = 169 \text{ mW}$, T6 : 42 °C (107.6 °F) T5 : 57 °C (134.6 °F) T4 : 82 °C (179.6 °F) T3 : 82 °C (179.6 °F) T2 : 82 °C (179.6 °F) T1 : 82 °C (179.6 °F) at $U_i = 16 \text{ V}$, $I_i = 76 \text{ mA}$, $P_i = 242 \text{ mW}$, T6 : 26 °C (78.8 °F) T5 : 41 °C (105.8 °F) T4 : 63 °C (145.4 °F) T3 : 63 °C (145.4 °F) T2 : 63 °C (145.4 °F) T1 : 63 °C (145.4 °F)	
-----------	---	--

Equipment protection level Gb

Type of protection	intrinsic safety
CE marking	CE 0102

Certificates

Appropriate type	SJ10-N...
ATEX certificate	PTB 99 ATEX 2219 X
ATEX marking	Ex II 1G Ex ia IIC T6...T1 Ga
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012
IECEX certificate	IECEX PTB 11.0091X
IECEX marking	Ex ia IIC T6...T1 Ga
Standards	IEC 60079-0:2011 , IEC 60079-11:2011

Effective internal capacitance	C_i	$\leq 50 \text{ nF}$ A cable length of 10 m is considered.
--------------------------------	-------	---

Effective internal inductance	L_i	$\leq 1000 \mu\text{H}$ A cable length of 10 m is considered.
-------------------------------	-------	--

Maximum permissible ambient temperature T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 34 \text{ mW}$, T6 : 72 °C (161.6 °F) T5 : 87 °C (188.6 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 64 \text{ mW}$, T6 : 66 °C (150.8 °F) T5 : 81 °C (177.8 °F) T4 : 100 °C (212 °F) T3 : 100 °C (212 °F) T2 : 100 °C (212 °F) T1 : 100 °C (212 °F) at $U_i = 16 \text{ V}$, $I_i = 52 \text{ mA}$, $P_i = 169 \text{ mW}$, T6 : 42 °C (107.6 °F) T5 : 57 °C (134.6 °F) T4 : 82 °C (179.6 °F) T3 : 82 °C (179.6 °F) T2 : 82 °C (179.6 °F) T1 : 82 °C (179.6 °F) at $U_i = 16 \text{ V}$, $I_i = 76 \text{ mA}$, $P_i = 242 \text{ mW}$, T6 : 26 °C (78.8 °F) T5 : 41 °C (105.8 °F) T4 : 63 °C (145.4 °F) T3 : 63 °C (145.4 °F) T2 : 63 °C (145.4 °F) T1 : 63 °C (145.4 °F)	
--	--	--

Equipment protection level Da

Type of protection	intrinsic safety
CE marking	CE 0102

Certificates

Appropriate type	SJ10-N...
ATEX certificate	PTB 99 ATEX 2219 X
ATEX marking	Ex II 1D Ex ia IIIC T135°C Da
Standards	EN 60079-0:2012+A11:2013 , EN 60079-11:2012
IECEX certificate	IECEX PTB 11.0091X
IECEX marking	Ex ia IIIC T135°C Da
Standards	IEC 60079-0:2011 , IEC 60079-11:2011

Effective internal capacitance	C_i	$\leq 50 \text{ nF}$ A cable length of 10 m is considered.
--------------------------------	-------	---

Effective internal inductance	L_i	$\leq 1000 \mu\text{H}$ A cable length of 10 m is considered.
-------------------------------	-------	--

Maximum permissible ambient temperature T_{amb}	Also observe the maximum permissible ambient temperature stated in the general technical data. Keep to the lower of the two values. at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 34 \text{ mW}$: 100 °C (212 °F) at $U_i = 16 \text{ V}$, $I_i = 25 \text{ mA}$, $P_i = 64 \text{ mW}$: 100 °C (212 °F) at $U_i = 16 \text{ V}$, $I_i = 52 \text{ mA}$, $P_i = 169 \text{ mW}$: 82 °C (179.6 °F) at $U_i = 16 \text{ V}$, $I_i = 76 \text{ mA}$, $P_i = 242 \text{ mW}$: 63 °C (145.4 °F)	
--	---	--

Equipment protection level Mb

Type of protection	intrinsic safety
--------------------	------------------

Certificates

Appropriate type	SJ10-N...
IECEX certificate	IECEX PTB 11.0091X
IECEX marking	Ex ia I Mb
Standards	IEC 60079-0:2011 , IEC 60079-11:2011

Effective internal capacitance	C_i	$\leq 50 \text{ nF}$ A cable length of 10 m is considered.
--------------------------------	-------	---

Effective internal inductance	L_i	$\leq 1000 \mu\text{H}$ A cable length of 10 m is considered.
-------------------------------	-------	--

Release date: 2019-04-02 10:36 Date of issue: 2019-04-02 106610_eng.xml



Maximum permissible ambient temperature T_{amb}

Also observe the maximum permissible ambient temperature stated in the general technical data.
Keep to the lower of the two values.
at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 34\text{ mW}$: 100 °C (212 °F)
at $U_i = 16\text{ V}$, $I_i = 25\text{ mA}$, $P_i = 64\text{ mW}$: 100 °C (212 °F)
at $U_i = 16\text{ V}$, $I_i = 52\text{ mA}$, $P_i = 169\text{ mW}$: 82 °C (179.6 °F)
at $U_i = 16\text{ V}$, $I_i = 76\text{ mA}$, $P_i = 242\text{ mW}$: 63 °C (145.4 °F)