



**Model Number**

**OBT30-R2-E2**

Triangulation sensor (BGS)  
with 2 m fixed cable


**Features**

- Ultra-small housing design
- 45° cable outlet for maximum mounting freedom under extremely tight space constraints
- Improvement in machine availability with abrasion-resistant, antistatic glass front
- Highly visible light spot, even on dark materials
- Precision object detection, almost irrespective of the color


**Product information**

The nano sensor has been developed for a broad range of applications. It offers excellent durability and is exceptionally easy to install. The housing is compact and, with its 45° cable outlet, can be installed in the smallest spaces. New functional principles and functionality open up a range of new options. The abrasion-resistant lens allows long operating times close to the moving object.


**Dimensions**

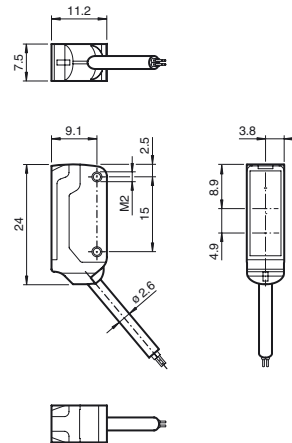

**Electrical connection**



**Indicators/operating means**

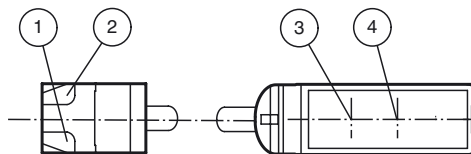

|   |                   |        |
|---|-------------------|--------|
| 1 | Operating display | green  |
| 2 | Signal display    | yellow |
| 3 | Emitter           |        |
| 4 | Receiver          |        |

Release date: 2017-07-17 13:41 Date of issue: 2017-07-17 225919\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**Technical data****General specifications**

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Detection range                   | 1 ... 30 mm                          |
| Reference target                  | standard white, 100 mm x 100 mm      |
| Light source                      | LED                                  |
| Light type                        | modulated visible red light , 630 nm |
| Black/White difference (6 %/90 %) | < 7 % at 30 mm                       |
| Angle deviation                   | approx. 2 °                          |
| Diameter of the light spot        | approx. 2 mm at a distance of 30 mm  |
| Angle of divergence               | approx. 2 °                          |
| Optical face                      | frontal                              |
| Ambient light limit               | EN 60947-5-2 : 30000 Lux             |

**Functional safety related parameters**

|                                |       |
|--------------------------------|-------|
| MTTF <sub>d</sub>              | 800 a |
| Mission Time (T <sub>M</sub> ) | 20 a  |
| Diagnostic Coverage (DC)       | 0 %   |

**Indicators/operating means**

|                     |   |
|---------------------|---|
| Operation indicator | LED green: Power on flashing: Short circuit/overload indication |
| Function indicator  | LED yellow ON: lights when object is detected                   |

**Electrical specifications**

|                        |                |                          |
|------------------------|----------------|--------------------------|
| Operating voltage      | U <sub>B</sub> | 10 ... 30 V DC , class 2 |
| No-load supply current | I <sub>0</sub> | < 10 mA                  |
| Protection class       |                | III                      |

**Output**

|                     |                |   |
|---------------------|----------------|---|
| Switching type      |                | NO contact  |
| Signal output       |                | 1 PNP output, short-circuit protected, reverse polarity protected, open collector |
| Switching voltage   |                | max. 30 V DC  |
| Switching current   |                | max. 50 mA , resistive load   |
| Voltage drop        | U <sub>d</sub> | ≤ 1.5 V DC  |
| Switching frequency | f              | approx. 800 Hz  |
| Response time       |                | 600 μs  |

**Directive conformity**

|                               |  |
|-------------------------------|--|
| Electromagnetic compatibility |  |
| Directive 2014/30/EU          | EN 60947-5-2:2007 EN 60947-5-2/A1:2012 |

**Ambient conditions**

|                     |                                |
|---------------------|--------------------------------|
| Ambient temperature | -25 ... 60 °C (-13 ... 140 °F) |
| Storage temperature | -30 ... 70 °C (-22 ... 158 °F) |

**Mechanical specifications**

|                      |   |
|----------------------|---|
| Housing width        | 7.5 mm  |
| Housing height       | 24 mm   |
| Housing depth        | 11.2 mm   |
| Degree of protection | IP67  |
| Connection           | 2 m fixed cable   |
| Material             |   |
| Housing              | PC/ABS and TPU  |
| Optical face         | glass   |
| Cable                | PUR   |
| Installation         | Fixing screws , 2 x M2 allen head screws included with delivery |
| Mass                 | approx. 20 g  |
| Cable length         | 2 m   |

**Approvals and certificates**

|              |  |
|--------------|--|
| UL approval  | E87056 , cULus Recognized, Class 2 Power Source              |
| CCC approval | CCC approval / marking not required for products rated ≤36 V |

**Accessories****MH-R2-01**

Mounting aid for R2 series, Mounting bracket

**MH-R2-02**

Mounting aid for R2 series, Mounting bracket

**MH-R2-03**



Mounting aid for R2 series, Mounting bracket

**MH-R2-04**

Mounting aid for R2 series, Mounting bracket

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

**Curves/Diagrams**

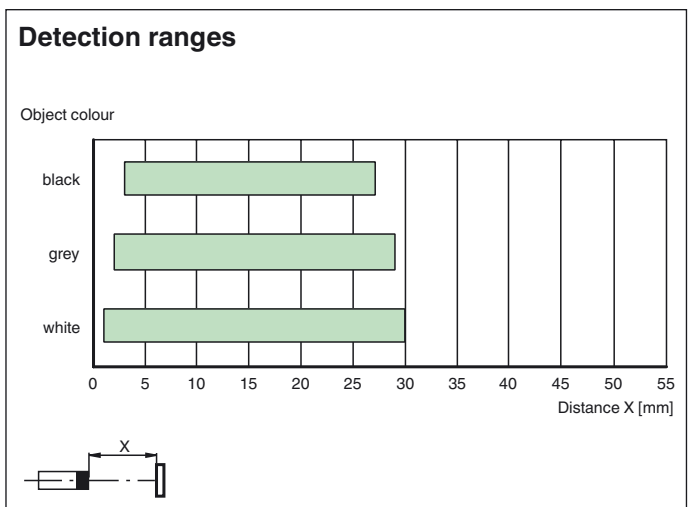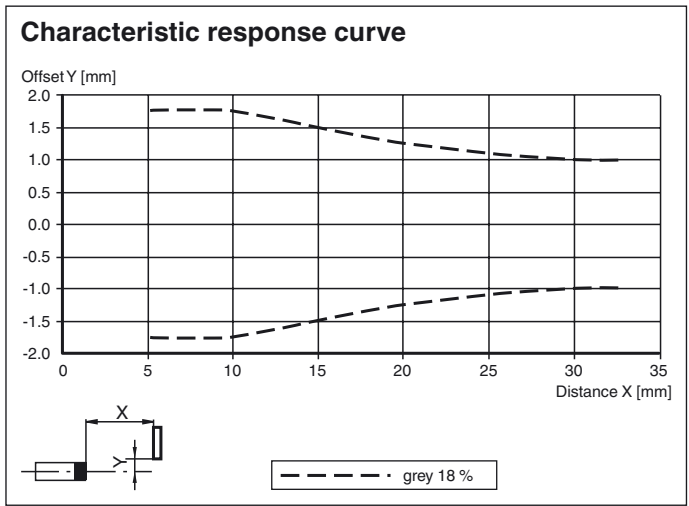

Release date: 2017-07-17 13:41 Date of issue: 2017-07-17 225919\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com