



Model Number

VLD700-F280-2E2-1000

Features

- Intelligent exposure time control
- Laser class 1, eyesafe
- Data Matrix control codes for parameterization


Laserlabel

**CLASS 1
LASER PRODUCT**
IEC 60825-1: 2007 certified.
Complies with 21 CFR
1040.10 and 1040.11 except
for deviations pursuant to
Laser Notice No. 50,
dated June 24, 2007

Function


The SmartRunner Detector performs high-precision area monitoring and switches as soon as the smallest objects enter the field of detection. The detector is based on innovative SmartRunner technology and combines the light section method for detecting height profiles with a 2-D vision sensor. The light section method involves projecting a laser line onto an object. This laser line is then detected by a camera at a specific angle. A height profile is then created using the triangulation principle. This innovative laser technology provides reliable measurements on different surfaces.

Indicating / Operating means

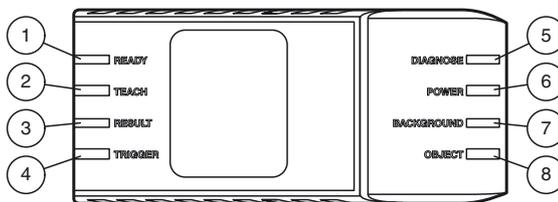

1	Ready	green/red
2	Teach	green/yellow
3	Result	green/red
4	Trigger	green/yellow
5	Diagnose	red
6	Power	green
7	Background	green
8	Object	yellow

Electrical connection



Pin	Signal
1	IN Trigger
2	+UB
3	Data+ RS-485
4	Data- RS-485
5	Teach
6	Background
7	GND
8	Object

Technical data

General specifications

Measurement range	X = 40 ... 310 mm ; Z = 60 ... 700 mm
Light source	laser diode
Light type	red laser + Integrated LED lightning red 650 nm
Laser nominal ratings	
Note	VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS
Laser class	1
Wave length	Measurement laser: 660 nm
Pulse length	Measurement laser: 2 ms
Maximum optical power output	Measurement laser: 15 mW
Laser monitoring	The safety system switches off the laser when the laser current is too high
Object size	> 0.1 mm at min. read distance
Scan rate	10 s ⁻¹

Functional safety related parameters

MTTF _d	20 a
Mission Time (T _M)	10 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Operation indicator	LED green
Diagnostics indicator	LED yellow / red
Function indicator	Trigger: LED yellow ; object in evaluation range : LED red / green
Control elements	2 push-buttons

Electrical specifications

Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA

Release date: 2019-01-10 14:35 Date of issue: 2019-01-10 284586-100002_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Power consumption	P_0	max. 6 W , Outputs without load
Interface		
Interface type		RS 485 interface
Physical		Switchable terminal resistor
Protocol		binary code
Transfer rate		38400 ... 230400 Bit/s
Input		
Input voltage		24 V
Number/Type		External triggering + 1 Input
Switching threshold		low: < 2.5 V, high: > 8 V
Output		
Number/Type		2 digital outputs
Switching type		PNP
Switching voltage		24 V
Switching current		150 mA each output
Ambient conditions		
Operating temperature		-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)
Storage temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Degree of protection		IP67
Connection		8-pin, M12 x 1 connector (supply + RS485 + Inputs/Outputs) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material		
Housing		PC/ABS
Optical face		Plastic pane
Mass		approx. 125 g
Tightening torque, fastening screws		≤ 2 Nm
General information		
Note		Security Instructions: - Read the operating instructions before attempting commissioning - Installation, connection and adjustments should only be undertaken by specialist personnel - Not a safety component in accordance with the EU Machinery Directive
Compliance with standards and directives		
Standard conformity		
Noise immunity		EN 61000-6-2:2005
Emitted interference		EN 61000-6-4:2007/A1:2011
Degree of protection		EN 60529
Shock and impact resistance		EN 60068-2-27:2009
Laser class		IEC 60825-1:2007
Approvals and certificates		
CCC approval		CCC approval / marking not required for products rated ≤36 V
Approvals		CE

Accessories

- V19-G-5M-PUR-ABG**
Female cordset, M12, 8-pin, shielded, PUR cable
 - VLX-MB1**
Mounting bracket
 - VLX-MB2**
Mounting bracket
 - PCV-USB-RS485-Converter Set**
USB to RS 485 interface converter
 - V19-G-BK0,6M-PUR-U-V1-G-SRDET**
Cordset for SmartRunner Detector, M12 to M12, 8/4-pin, PUR cable
- Other suitable accessories can be found at www.pepperl-fuchs.com

Notes


Measuring range

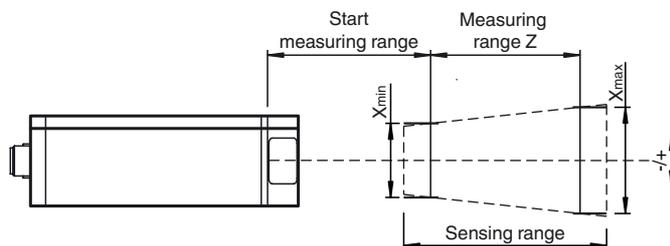


Release date: 2019-01-10 14:35 Date of issue: 2019-01-10 284586-100002_eng.xml

Notes

Positioning of SmartRunner to the Object for Detection

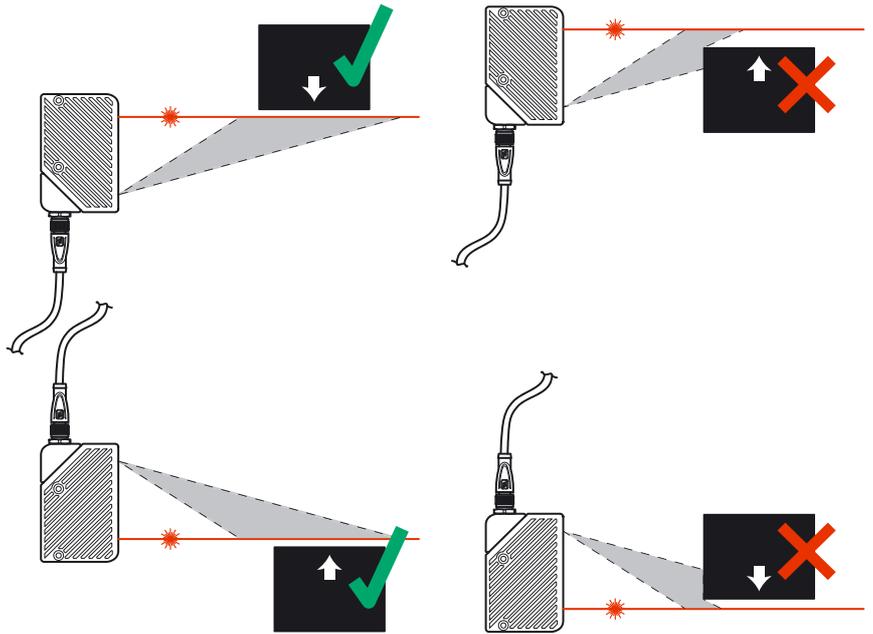

Dimensions

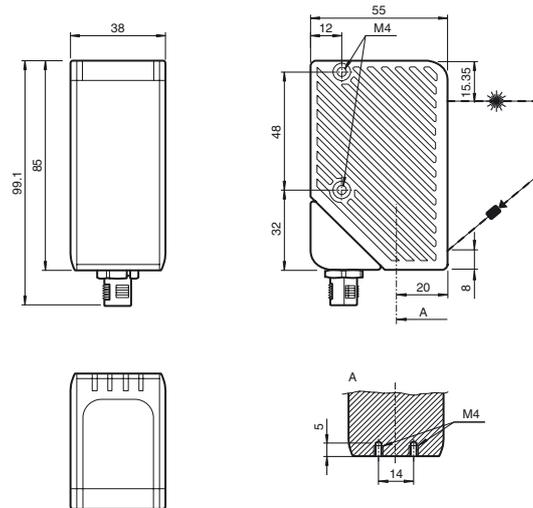

Laser notice laser class 1

- The irradiation can lead to irritation especially in a dark environment. Do not point at people!
- Maintenance and repairs should only be carried out by authorized service personnel!
- Attach the device so that the warning is clearly visible and readable.
- The warning accompanies the device and should be attached in immediate proximity to the device.
- Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Release date: 2019-01-10 14:35 Date of issue: 2019-01-10 284586-100002_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".